



DISPLAY
CONCEPTS

Artika

Gelato & Ice Cream Showcase

H135



Features: Professional gelato & ice cream showcase with single laminar air flow or optional dual forced-air system. Storage area underneath display surface on single laminar air flow units only. Heated tempered curved front glass panel with downward opening feature. Heated tempered side glass panels. LED lighting underneath payment surface and on flavor board. Back enclosed by sliding rear doors. Refrigeration system with twin evaporators, painted with corrosion-resistant coating, automatic reverse cycle defrosting, automatic showcase condensate evaporation with integral motor (condensate drain for connection to drainage system when remote motor). The condenser unit can be self contained or remote.

ARTIKA GELATO & ICE CREAM SHOWCASE

Operating temperature 0°F/+10°F (-18°C/-12°C)

Climate Class 4 (30° C- 55% R.H.)

Relative Humidity 55% -60%

Structure: stainless steel & aluminum

Front glass: piston opening

Glass panels: tempered and heated

Front & side base panels: lacquered in a variety of RAL colors; side panel with insert

Compressor: available integral or remote

Defrosting: automatic cycle inversion

Lighting: fluorescent lamp, LED optional

Electric: 220V 20A 1Phase

Plumbing: none required

Dual Ventilation: optional




info@fmdisplayconcepts.com
800-889-3975
www.fmdisplayconcepts.com




DISPLAY
CONCEPTS

Artika


Gelato & Ice Cream Showcase

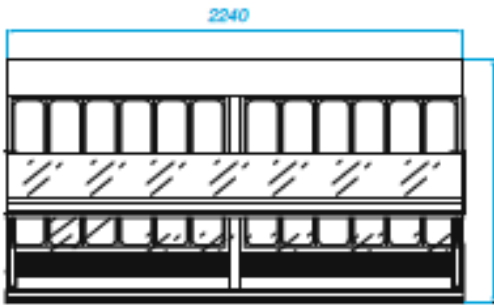


12+12

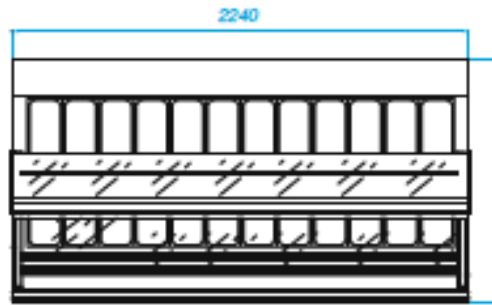


24

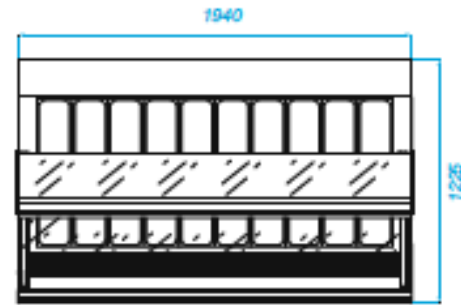


20

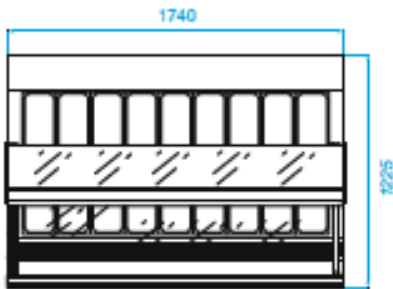



18

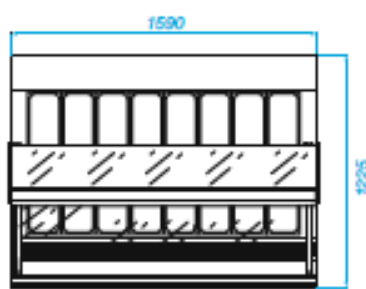

16



12

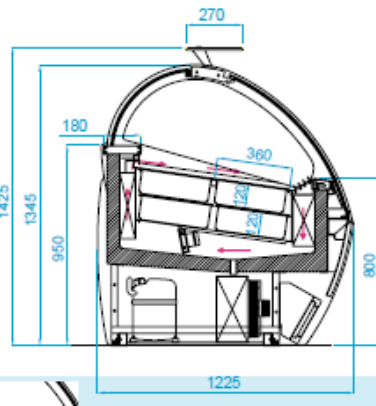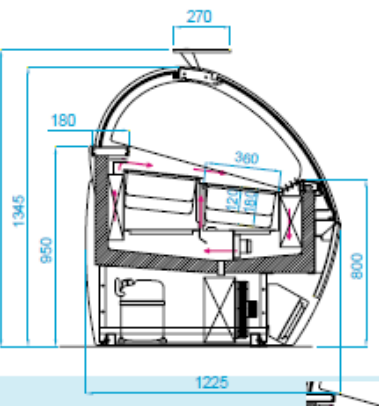

Feature	inches	mm
Depth (All)	48.2	1225
Height (All)	56.1	1425
Length (12 pan)	48.8	1240
Length (16 pan)	62.6	1590
Length (18 pan)	68.5	1740
Length (20 pan)	76.4	1940
Length (24 pan)	88.2	2240
Length (12 + 12)	88.2	2240

ETL LISTED
 US
 Intertek
 3094110
 CONFORMS TO UL STD 471; NSF STD 7
 CERTIFIED TO CAN/CSA C22.2 STD No. 120



frigomeccanica
 Arredamenti Bar